



UNIVERSAL SILENCER
 Acoustic and Emission Technologies
 PO Box 411 Stoughton, WI 53589
 608-873-4272 Fax 608-873-4298
 info@universalsilencer.com
 www.universalsilencer.com

**EXHAUST FLEXIBLE
 CONNECTORS
 STAINLESS STEEL**

DRAWING

88-1046



REV.

2

DRAWN

DATE

4-1-91

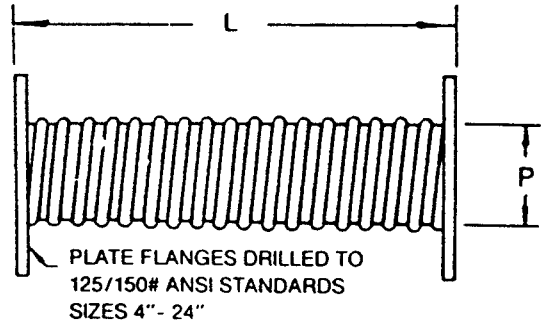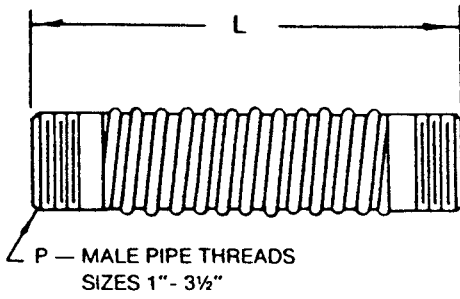

PART NUMBER	P	L	APPROX. WT.
81-1315	1	18	4
81-1316	1½	18	6
81-1317	2	18	7
81-1318	2½	18	9
81-1319	3	18	10
81-1320	3½	18	12
81-1321	4	18	14
81-1322	5	18	17
81-1323	6	18	24
81-1324	8	18	36
81-1325	10	18	62
81-1326	12	18	69
81-1327	14	18	90
81-1328	16	18	110
81-1329	18	18	130
81-1330	20	18	155
81-1331	22	18	180
81-1332	24	18	220

NOTES:

1. Stainless steel flexible connectors are equipped with carbon steel pipe nipples or flanges. The flexible tubing is type 321 stainless steel.
2. Flexible connectors are intended to compensate for thermal expansion and vibration only, not for misalignment.
3. Maximum operating temperature: 1200°F.