REVISION RECORD			
NO.	CHANGE DESCRIPTION	DRAWN	APP'D

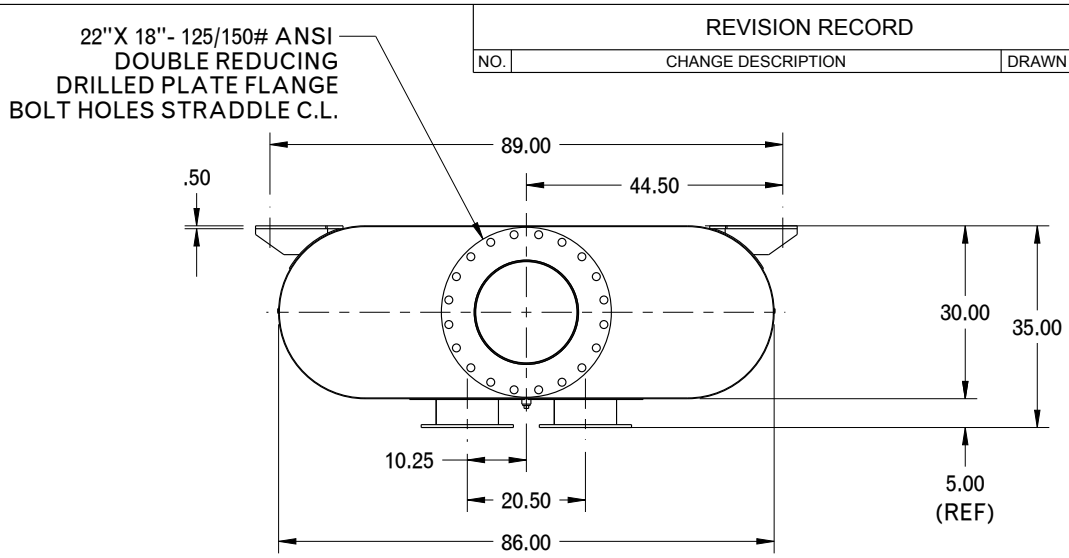

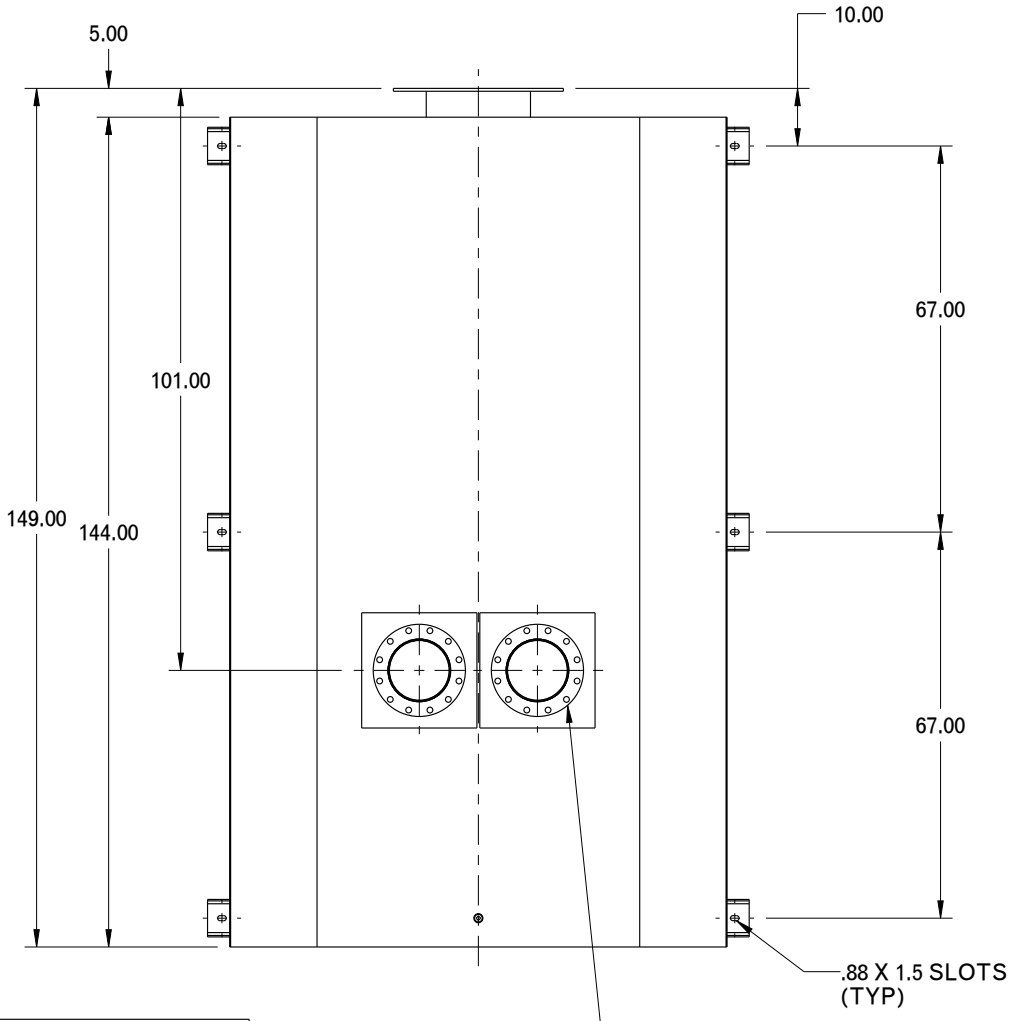

NOTES

1. FOR 2250 KW GEN SET WITH CAT 3516B ENGINE

DIMENSIONS CERTIFIED FOR:
P.O. NO:
U.S. S.O. NO:
BY
DATE

TOLERANCES UNLESS STATED - SEE FULL SPEC. 88-0075			
(mm)	US customary (")	(mm)	US customary (")
0-300	0-12	±1.6	±1/16
>300-600	>12-24	±3	±1/8
>600-900	>24-36	±5	±3/16
>900-6000	>36-240	±6	±1/4
>6000	>240	±12	±1/2
ANGULAR TOL		±2°	
APPROX. WT.	3850 LBS	MATERIAL	STEEL
FINISH	88-0219 BLACK HIGH HEAT ENAMEL		

Copyright © 2010 UNIVERSAL
All Rights Reserved

This Document and the information contained herein constitutes proprietary property, and shall not be copied or used or disclosed without the express written consent of Universal Acoustic & Emission Technologies Inc.

	NAME	DATE
DRAWN	GDG	27SEP2011
CHECKED	JDM	29SEP2011

UNIVERSAL
Acoustic & Emissions Technologies

DESIGN CONTROL:	STOUGHTON
SCALE:	DO NOT SCALE

DESCRIPTION
SPECIAL 18" w/ 10" DUAL INLETS
CRITICAL GRADE LOW-PROFILE EXHAUST SILENCER

THIRD ANGLE PROJECTION	DIMENSIONAL DWG. NO:	SHEET	REV.
	6F-818-AC	1 OF 1	0